

EL1008 | EtherCAT Terminal, 8-channel digital input, 24 V DC, 3 ms

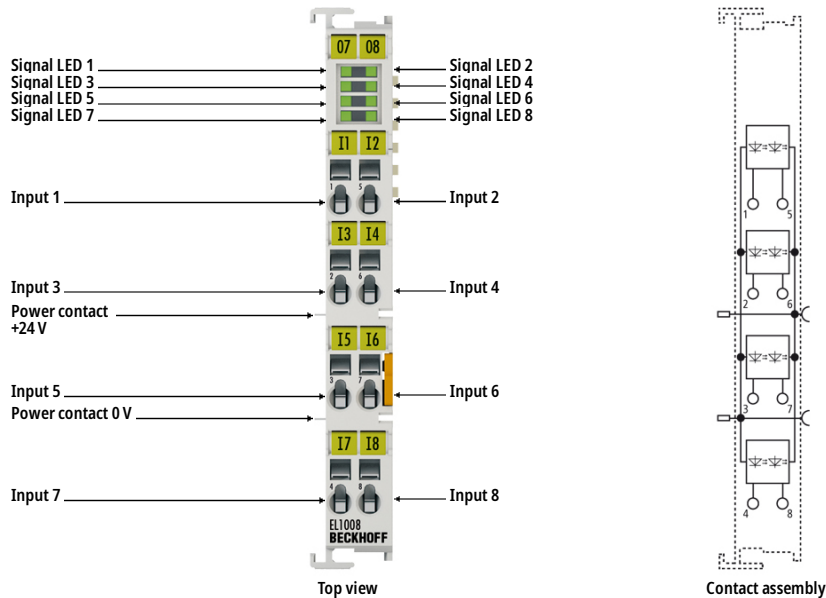



Image similar, may contain optional accessories

i **Product status:** regular delivery

The EL1008 digital input terminal acquires the binary 24 V control signals from the process level and transmits them, in an electrically isolated form, to the higher-level automation unit. Each EtherCAT Terminal has eight channels that indicate their signal state via light emitting diodes.

Special features:

- input specification type 1/3
- no bouncing due to mechanical switches thanks to 3 ms input filter

Product information

Technical data

Technical data	EL1008
Connection technology	1-wire
Specification	EN 61131-2, type 1/3
Number of inputs	8
Nominal voltage	24 V DC (-15%/+20%)
"0" signal voltage	-3...+5 V (EN 61131-2, type 3)

"1" signal voltage	11...30 V (EN 61131-2, type 3)
Input current	typ. 3 mA (EN 61131-2, type 3)
Input filter	typ. 3.0 ms
Distributed clocks	–
Current consumption power contacts	typ. 2 mA + load
Current consumption E-bus	typ. 90 mA
Electrical isolation	500 V (E-bus/field potential)
Configuration	no address or configuration setting
Special features	standard input terminal for bouncing signals (filter 3 ms)
Weight	approx. 55 g
Operating/storage temperature	-25...+60°C/-40...+85°C
Relative humidity	95%, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/see documentation
Pluggable wiring	for all ESxxx terminals
Approvals/markings	CE, UL, ATEX, IECEx, DNV GL, cFMus
Ex marking	ATEX: II 3 G Ex ec IIC T4 Gc IECEx: Ex ec IIC T4 Gc cFMus: Class I, Division 2, Groups A, B, C, D Class I, Zone 2, AEx ec IIC T4 Gc

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxx series	
Wiring	solid conductor (s), flexible conductor (st) and ferrule (f): spring actuation by screwdriver	

Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²	s*: 0.08...1.5 mm ² , st*: 0.08...1.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG28...14, st*: AWG28...14, f*: AWG26...16	s*: AWG28...16, st*: AWG28...16, f*: AWG26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I _{max} : 10 A	

*s: solid wire; st: stranded wire; f: with ferrule

Ordering information

Ordering information	
EL1008	EtherCAT Terminal, 8-channel digital input, 24 V DC, 3 ms
ES1008	EtherCAT Terminal, 8-channel digital input, 24 V DC, 3 ms, pluggable wiring